




WORKING FOR GENERATIONS TO COME!

Woods have landscape rakes in standard and medium duty, built from high strength box-type beams and spring-steel tines handle rocks, dirt and sand. Featuring adjustable angles and 360° pivot control flow of material to left, right or centre. The adjustable rake offers five forward and five reverse positions. Cutting widths range from 1.3m (4'6ft) to 2.4 (8ft) and have options for both sub-compact and compact tractors.

Woods Landscape Rakes are built with rugged durability for tough clean-up jobs, as well as fine raking features for light-duty lawn care and general maintenance.

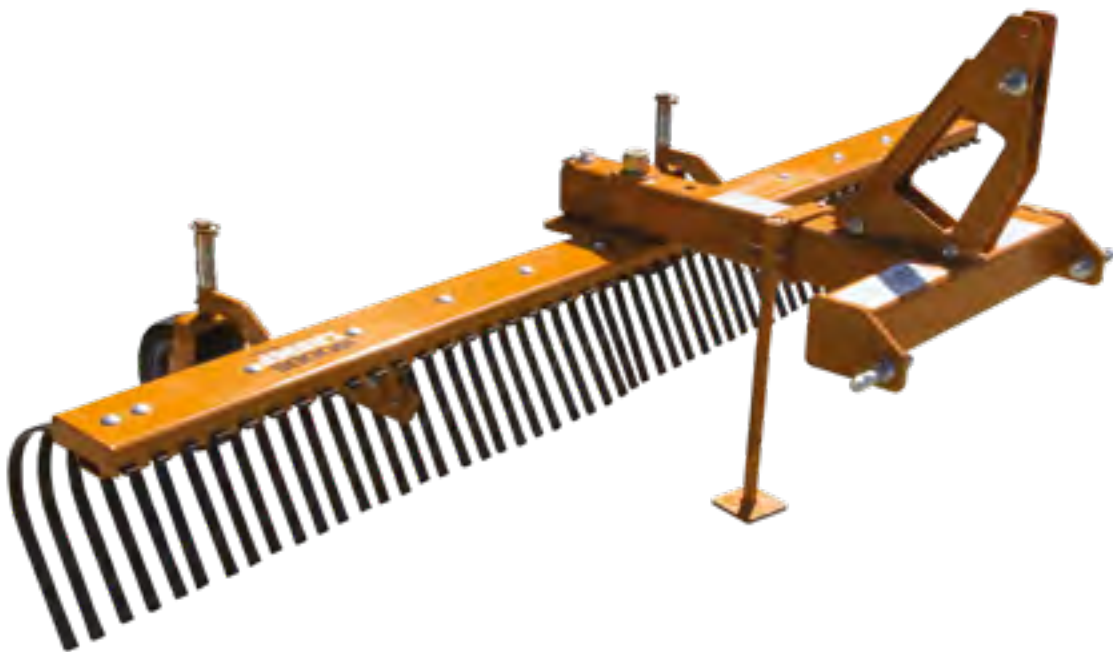

- High-strength, box-type beams and spring steel tines handle rocks, dirt and sand
- Adjustable angles and 360-degree pivot control flow of material to left, right or centre
- 25mm tine spacing provides superior material collection for a smooth, even grade
- Optional dual-gauge wheels for depth control

Tractor PTO HP Range:

up to 50HP

Models

LRS52 | up to 30hp

LRS60 | up to 30hp

LRS72 | up to 30hp

LRS72P | 20 - 50hp

LRS84P | 20 - 50hp

LRS96P | 20 - 50hp

WOODS POWER - POWER TO BE MORE PRODUCTIVE



LRS72

SPECIFICATIONS		LANDSCAPE RAKES				
MODEL	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS95P
Tractor PTO Horsepower	up to 30hp			20 - 50hp		
Tractor Hitch	Cat 1 & Limited Cat 1 (sub compact)			Cat 1		
Working Width	1.35m (53")	1.5m (60")	1.8m (72")		2.1m (84")	2.4m (96")
Weight	70kg	76kg	84kg	130kg		141kg
Pivot Angle	Forward – 5 @ 15°, Reverse – 5 @ 15°					
Tines Dimensions	7.9mm x 25.4mm (5/16" x 1")					
Tines Spacing	25.4mm (1")					
Gauge Wheels	Optional					
Parking Stand	Optional					
ASABE Quick-Hitch Compatible	Yes					